

LMK 458



Probe For Marine And Offshore

Ceramic Sensor

accuracy according to EN IEC 62828-2:
standard: 0.25 % span
option: 0.1 % span

Nominal pressure

from 0 ... 40 cmH₂O up to 0 ... 200 mH₂O

Output signals

2-wire: 4 ... 20 mA
others on request

Special characteristics

- ▶ diameter 39.5 mm
- ▶ LR-certificate (Lloyd's Register)
- ▶ DNV Approval (Det Norske Veritas)
- ▶ ABS-certificate (American Bureau of Shipping)
- ▶ CCS-certificate (China Classification Society)
- ▶ high overpressure resistance
- ▶ high long-term stability

Optional versions

- ▶ diaphragm Al₂O₃ 99.9 %
- ▶ different housing materials (stainless steel, CuNiFe)
- ▶ IS-version Ex ia = intrinsically safe for gas
- ▶ screw-in and flange version
- ▶ accessories e.g. assembling and probe flange, mounting clamp

The hydrostatic probe LMK 458 has been developed for measuring level in service and storage tanks and is as a consequence certificated for shipbuilding and offshore applications.

A permissible operating temperature of up to 125°C and the possibility to use the device in intrinsic safe areas enable to measure the pressure of various fluids under extreme conditions. The basis for the LMK 458 is a capacitive ceramic sensor element designed by BD SENSORS, which offers a high overload resistance and medium compatibility.

Preferred areas of use are



Water

drinking water abstraction
desalinization plant



Shipbuilding / Offshore

ballast tanks

monitoring of a ship's position
and draught

level measurement in ballast and storage tanks




Pressure ranges																		
Nominal pressure ¹	[bar]	0.04	0.06	0.1	0.16	0.25	0.4	0.6	1	1.6	2.5	4	6	10	16	20		
Level	[mH ₂ O]	0.4	0.6	1	1.6	2.5	4	6	10	16	25	40	60	100	160	200		
Overpressure	[bar]	2	2	4	4	6	6	8	8	15	25	25	35	35	45	45		
Permissible vacuum	[bar]	-0.2		-0.3		-0.5				-1								
max. ambient pressure (housing)		40 bar																
¹ available in gauge, sealed gauge and absolute; nominal pressure ranges sealed gauge and absolute from 1 bar																		
Output signal / Supply																		
Standard		2-wire: 4 ... 20 mA / V _S = 9 ... 32 V _{DC}							V _S rated = 24 V _{DC}									
Option IS-version		2-wire: 4 ... 20 mA / V _S = 14 ... 28 V _{DC}							V _S rated = 24 V _{DC}									
Performance																		
Accuracy ²		standard: ≤ ± 0.25 % span							option: for P _N ≥ 0.6 bar ³ : ≤ ± 0.1 % span									
Permissible load		R _{max} = [(V _S - V _S min) / 0.02 A] Ω							Long term stability : ≤ ± 0.1 % span / year									
Influence effects		supply: 0.05 % span / 10 V							permissible load: 0.05 % span / kΩ									
Turn-on time		700 msec																
Mean response time		< 200 msec					mean measuring rate 5/sec					Max. response time: 380 msec						
² accuracy according to EN IEC 62828-2- limit point adjustment (non-linearity, hysteresis, repeatability)																		
³ Under the influence of disturbance burst according to EN 61000-4-4 (2004) +2 kV accuracy decreased to ≤ ± 0.25 % span.																		
Thermal effects / Permissible temperatures																		
Thermal error		≤ ± 0.1 % span / 10 K							in compensated range -20 ... 80 °C									
Permissible temperatures		medium / electronics / environment: -25 ... 125 °C (depends on cable sheath / seals) storage: -40...125 °C																
Electrical protection ⁴																		
Short-circuit protection		permanent																
Reverse polarity protection		no damage, but also no function																
Electromagnetic compatibility		emission and immunity according to - EN 61326 - DNV (Det Norske Veritas)																
⁴ additional external overvoltage protection unit in terminal box KL 1 or KL 2 with atmospheric pressure reference available																		
Mechanical stability																		
Vibration		4 g (according to DNV: class B, curve 2 / basis: DIN EN 60068-2-6)																
Cable with sheath material		TPE-U blue Ø 7.4 mm																
Bending radius		static installation: 10-fold cable diameter dynamic application: 20-fold cable diameter																
<i>(shielded cable with integrated ventilation tube for atmospheric pressure reference (for nominal pressure ranges absolute, the ventilation tube is closed)</i>																		
Electrical connection																		
Cable outlet		shielded cable with integrated air tube for atmospheric reference (for nominal pressure ranges sealed gauge and absolute, the air tube is plugged)																
Materials																		
Housing		standard: stainless steel 1.4404 (316L)							option: CuNi10Fe1Mn (resistant against sea water) others on request									
Seals (media wetted)		standard: FKM							options: EPDM, FFKM (min. permissible temperature from -15 °C) others on request									
Diaphragm		standard: ceramics Al ₂ O ₃ 96 %							option: ceramics Al ₂ O ₃ 99.9 %									
Protection cap		POM-C																
Cable sheath		TPE -U (-25 ... 125 °C) (flame-resistant, halogen free, increased resistance against oil and gasoline, resistant against salt, sea water, heavy oil)																
Miscellaneous																		
Option cable protection for probes in stainless steel		prepared for mounting with stainless steel pipe																
Ingress protection		IP 68																
Current consumption		max. 21 mA																
Weight		min. 650 g (without cable)																
CE-conformity		EMC Directive: 2014/30/EU																
ATEX Directive		2014/34/EU																
Option Pt 100 temperature element ⁵ (not possible with IS-version)																		
Temperature range		-25 ... 125 °C																
Connection temperature element		3-wire																
Resistance		100 Ω at 0 °C																
Temperature coefficient		3850 ppm/K																
Supply I _s		0.3 ... 1.0 mA _{DC}																
Category of the environment																		
Lloyd's Register (LR)		EMV1, EMV2, EMV3, EMV4							number of certificate: 13/20055									
Det Norske Veritas (DNV)		temperature: D humidity: B							vibration: B									
		electromagnetic compatibility: B							number of certificate: TA00001GM									
IS-protection (not possible with Pt1000 temperature element)																		
Approval DX4A-LMK 458		IBExU 07 ATEX 1180 X							zone 0 ⁶ : II 1G Ex ia IIB T4									
Safety technical maximum values		U _i = 28 V, I _i = 93 mA, P _i = 660 mW, C _i = 105 nF; L _i = 0 μH; the supply connections have an inner capacity of max. 140 nF opposite the enclosure																
Permissible temp. for environment		in zone 0 ⁶ : -20 ... 60 °C with p _{atm} 0.8 bar up to 1.1 bar							zone 1 and higher: -25 ... 70 °C									
Connecting cables (by factory)		cable capacity: signal line/shield as well as signal line/signal line: 160 pF/m							cable inductance: signal line/shield as well as signal line/signal line: 1 μH/m									
⁵ only for 4...20mA, cable length max. 5m																		


⁶ for optional stainless steel pipe the following designation is valid: "II 1 G Ex ia IIC T4" (zone 0)

Wiring diagrams

2-wire-system (current)

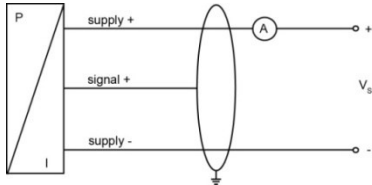

2-wire-system (current) with Pt 100

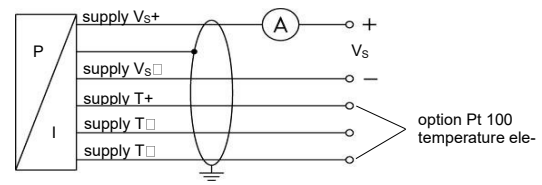


Pin configuration


Electrical connection	cable colours (DIN 47100)
Supply V_s+	wh (white)
Supply V_s-	bn (brown)
Option Pt 100 temperature element:	
Supply T+ (with Pt 100)	ye (yellow)
Supply T- (with Pt 100)	gy (grey)
Supply T- (with Pt 100)	pk (pink)
Shield	gn/ye (green / yellow)

Dimensions for housing in stainless steel and CuNiFe (mm / in)

probe versions

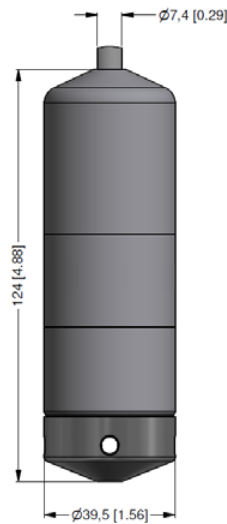


Screw-in version

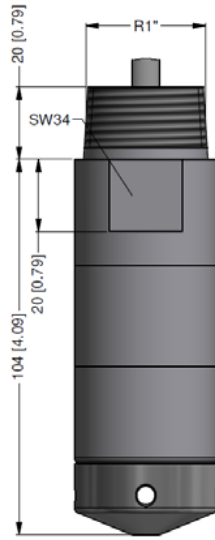


prepared for mounting with stainless steel pipe
stainless steel / CuNiFe

screw-in version

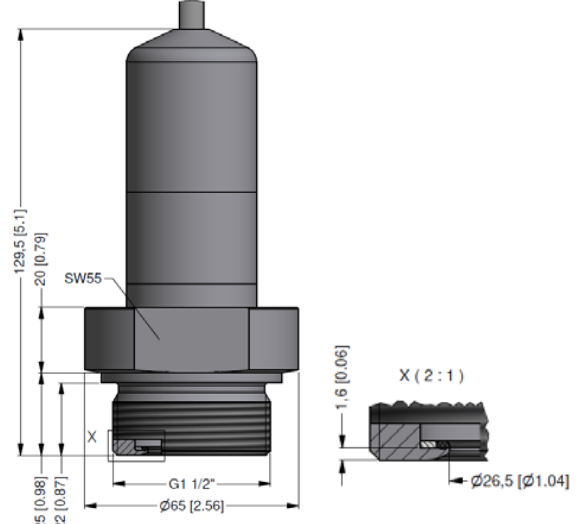


stainless steel / CuNiFe

flange version

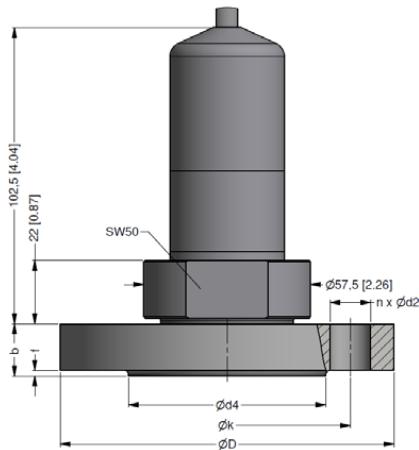


stainless steel / CuNiFe

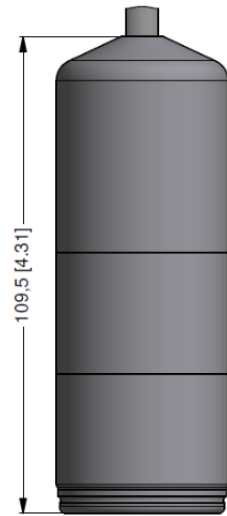


Protection cap removable

This data sheet contains product specification. properties are not guaranteed. Subject to change without notice.

Probe flange for flange version		
Technical data		
Suitable for	LMK 382, LMK 382H, LMK 458, LMK 458H	
Flange material	stainless steel 1.4404 (316L)	
Hole pattern	according to DIN 2507	
Version	Size (in mm)	Weight
DN25 / PN40	D = 115, k = 85, b = 18, n = 4, d = 14	1.2 kg
DN50 / PN40	D = 165, k = 125, b = 20, n = 4, d = 18	2.6 kg
DN80 / PN16	D = 200, k = 160, b = 20, n = 8, d = 18	4.1 kg
Ordering type		Ordering code
Probe flange DN25 / PN40		5000389
Probe flange DN50 / PN40		5000390
Probe flange DN80 / PN16		5000392

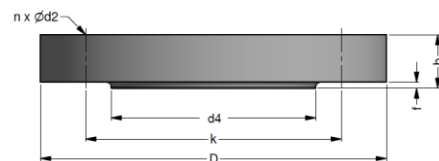

Assembling flange with cable gland		
Technical Data		
Suitable for	all probes	
Flange material	stainless steel 1.4404 (316L)	
Material of cable gland	standard: brass, nickel plated on request: stainless steel 1.4305 (303); plastic	
Seal insert	material: TPE (ingress protection IP 68)	
Hole pattern	according to DIN 2507	
Version	Size (in mm)	
DN25 / PN40	D = 115, k = 85, b = 18, n = 4, d = 14	
DN50 / PN40	D = 165, k = 125, b = 20, n = 4, d = 18	
DN80 / PN16	D = 200, k = 160, b = 20, n = 8, d = 18	
Ordering type		Ordering code
Assembling Flange DN25 / PN40		5000275
Assembling Flange DN50 / PN40		5000278
Assembling Flange DN80 / PN16		5000279

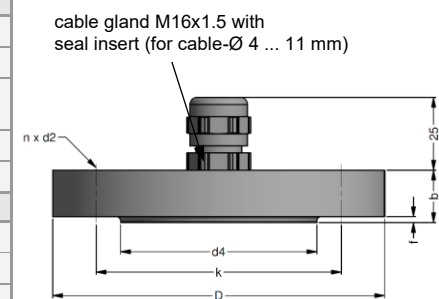

Terminal clamp		
Technical data		
Suitable for	all probes with cable Ø 5.5 ... 10.5 mm	
Material	standard: steel, zinc plated optionally: stainless steel 1.4301 (304)	
Weight	approx. 160 g	
Ordering type		Ordering code
Terminal clamp, steel, zinc plated		1003440
Terminal clamp, stainless steel 1.4301 (304)		1000278



Mounting screw PG16 - plastic	5002200
Flange with thread for flange version DN 25/PN 40	5000389
Flange with thread for flange version DN 50/PN 40	5000390
Flange with thread for flange version DN 80/PN 16	5000392
Mounting flange with cable gland (M 16 x 1,5) DN 25/PN 40	5000275
Mounting flange with cable gland (M 16 x 1,5) DN 50/PN 40	5000278
Mounting flange with cable gland (M 16 x 1,5) DN 80/PN 16	5000279

0,-...without additional charge

On request...in accordance with the producer

Version 502 is not possible for CuNiFe !!!

St. steel flange, clamp and pipe are not parts of the supply !!!

Surcharges for calibration are not subject to any discounts. Subject to change.

This document contains the specification for ordering the product; detailed technical parameters of the product and its possible variants are given in the data sheet.

BD SENSORS reserves the right to change sensor specifications without further notice.

1 nominal pressure ranges absolute from 1 bar

2 mounting accessories are not part of supply and have to be ordered separately

3 min. permissible temperature from -15 °C

4 shielded cable with integrated ventilation tube for atmospheric reference

5 not possible in combination with IS-version

6 possible for probes in stainless steel; stainless steel pipe is not part of the supply

